BMW N54B30 X-beam Conrods Main Dimensions


Brand: Hurricane	
Center to Center Length: 145mm/5.709"	a De 13 prin
Big End Bore Diameter: 53.6mm/2.110"	- (<u>stade</u>)
Big End Width: 20.86mm/0.821"	
Small End Bore Diameter: 22mm /0.866"	C/C Length: 145mm
Small End Width: 20.86mm/0.821"	BE Width: 20.86mm
Beam Style: X-beam	

BMW N54B30 X-beam Conrods Features

Connecting Rod Bolt Diameter	3/8 "	
Approximate Connecting Rod Weight	xxx	
Advertised Horsepower Rating	900HP	
Quantity	Sold at 6 pieces per set	
Material	Forged 4340 steel	
Connecting Rod Finish	Shot-peened, Polished	
Pin	Bronze wrist pin bushings	
Wrist Pin Style	Floating	
Cap Retention Style	Cap screw	
Weight Matched Set	Yes, Balanced +/- 1g	
Magnafluxed	Yes	
Private Label	Yes, available	
Custom design	Yes, accept	

Additional Description :

- 1). Per rod made from high tensile 4340 steel forgings .
- 2). MOQ : 80pcs per model .
- 3). 100% CNC machined , they can hold 900HP per cylinder .

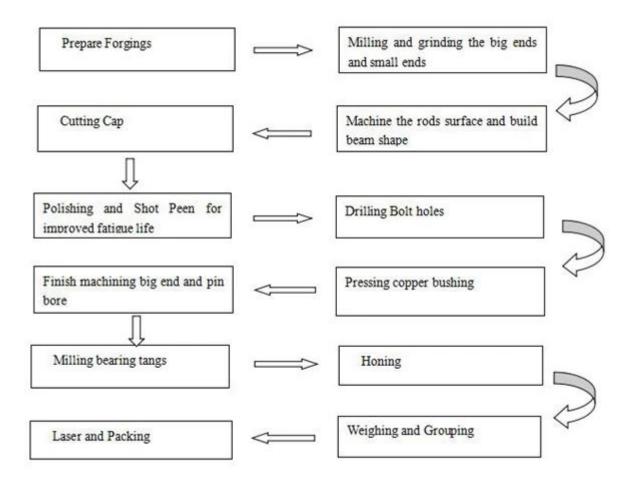

- 4). They are fitting with standard 3/8 " ARP2000 bolts.
- 5). Polished and shot peened for better fatigue life .



- 6). Honed with SUNNEN honing machine for tight tolerance .
- 7). They can be designed and engineered to $\underline{\textbf{various beam style}}$.



8) . Accept Custom Connecting Rods Order .

Please don't hesitate to contact us if you have any further question for this product .