


Brand: Hurricane
Engine: Chrysler RB 426 440 HEMI
Part Type: Connecting Rods
Center to Center Length: 174.24mm/6.860"
Big End Bore Diameter: 63.5mm/2.500"
Big End Width: 25.58mm/1.007"
Small End Bore Diameter: 26.16mm /1.030"
Small End Width: 25.4mm/1.250"
Beam Style: H-beam
Connecting Rod Bolt Diameter: 7/16"
Approximate Connecting Rod Weight: 800g/piece
Advertised Horsepower Rating: 1000hp
Quantity: Sold as 8 pieces /set
Material: Forged 4340 steel
Connecting Rod Finish: Shot-peened, Polished
Pin: Bronze wrist pin bushings
Wrist Pin Style: Floating
Cap Retention Style: Cap screw
Weight Matched Set: Yes ,Balanced +/- 1g
Magnafluxed: Yes
Private Label: Yes ,available
Custom design: Yes, accept

1. Precision finished at [Hurricane Speed&Performance](#) on the newest and most modern machinery.
2. Engineered and processed from high strength 4340 chromoly steel forgings
3. Micro-polished and shot blasted not only improve fatigue life, but also leave a smooth and beautiful appearance.
4. Per rod's small end bushed for floating piston pins.
5. Weight matched sets within 2gram for optimal balancing .

Process of finish connecting rod at Hurricane workshop

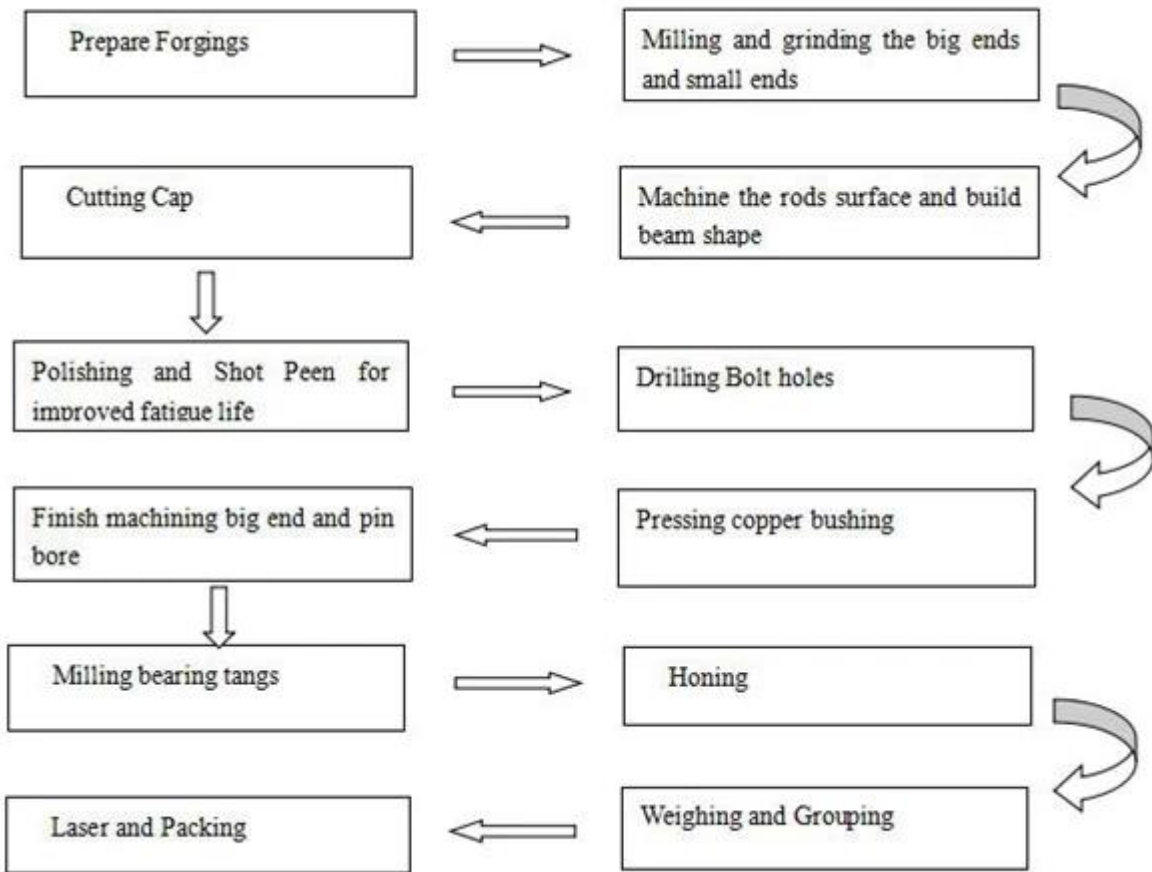

Hurricane connecting rods factory workshop



Hurricane also offer Ford H beam connecting rods, including Small Block, Big Block, 351 WINDSOR and so on. Visit [Ford Rods Page](#) for sizes and general information. You may also find [FAQs](#) and [Video](#) pages helpful.