

I-Beam Connecting Rods Nissan RB25DET, RB26DETT - 21mm pin Main Sizes

Brand: Hurricane	
Center to Center Length: 121.49mm/4.783"	
Big End Bore Diameter: 51mm/2.008"	
Big End Width: 21.8mm/0.858"	
Small End Bore Diameter: 21mm /0.827"	
Small End Width: 21.8mm /0.858"	
Beam Style: I-beam	

I-Beam Rods Nissan RB26 RB26DETT More details

Connecting Rod Bolt Diameter	3/8"
Approximate Connecting Rod Weight	XXXg
Advertised Horsepower Rating	1200hp
Quantity	Sold as 6 pieces /set
Material	Forged 4340 steel
Connecting Rod Finish	Shot-peened, Polished
Pin	Bronze wrist pin bushings
Wrist Pin Style	Floating
Cap Retention Style	Cap screw
Weight Matched Set	Yes, Balanced +/- 1g
Magnafluxed	Yes
Private Label	Yes, available
Custom design	Yes, accept

RB26 / RB25 CONNECTING RODS Description

Hurricane Speed and Performance is manufacturer of high performance automotive engine parts. We specialize in the rotating assembly and related components; crankshafts, rods and pistons. All our products are developed and produced in our factory on advanced CNC machinery. Besides 4340 steel conrod, titanium and aluminum rods can be provided also. First, browse our website: [4340 STEEL, TITANIUM AND](#)

[ALUMINUM CONNECTING RODS](#), then arrange a factory tour by emailing: marketing@hurricane-rod.com.cn

Hurricane I-Beam Rods Nissan Engine: RB25, RB26 are right up there at the top of the food chain. We have been doing this since 2000 and have never seen anyone out-power one. If you are looking for a rod that will handle big power without a problem, we are your an excellent choice. They come standard with ARP 2000 Bolts or you can choose to upgrade up to ARP 625+ rod bolt that can handle more power and higher RPM. If you are not sure if this is the correct rod for you, please [contact one](#) of our experienced sales reps today to help you put together the parts list for your next build!

I-Beam Rods Nissan RB26 RB26DETT features:

Factory made and provided directly

Forged from 4340 aircraft quality vacuum degassed material

Shot peened after Fully CNC machined

Cap fasteners are fitted with 3/8" ARP 2000 cap screws


Specifically designed to handle high horsepower applications when using turbos

Horsepower range for these rods is 175-200 horsepower per rod.

Related product: [H-Beam Connecting Rods \(6 PCS\) for Nissan RB26/RB25 Engine](#)

FAQ: would you kindly let me know how the packing of each conrod is?

First package: each conrod is rust guarded and in sealed plastic bag;

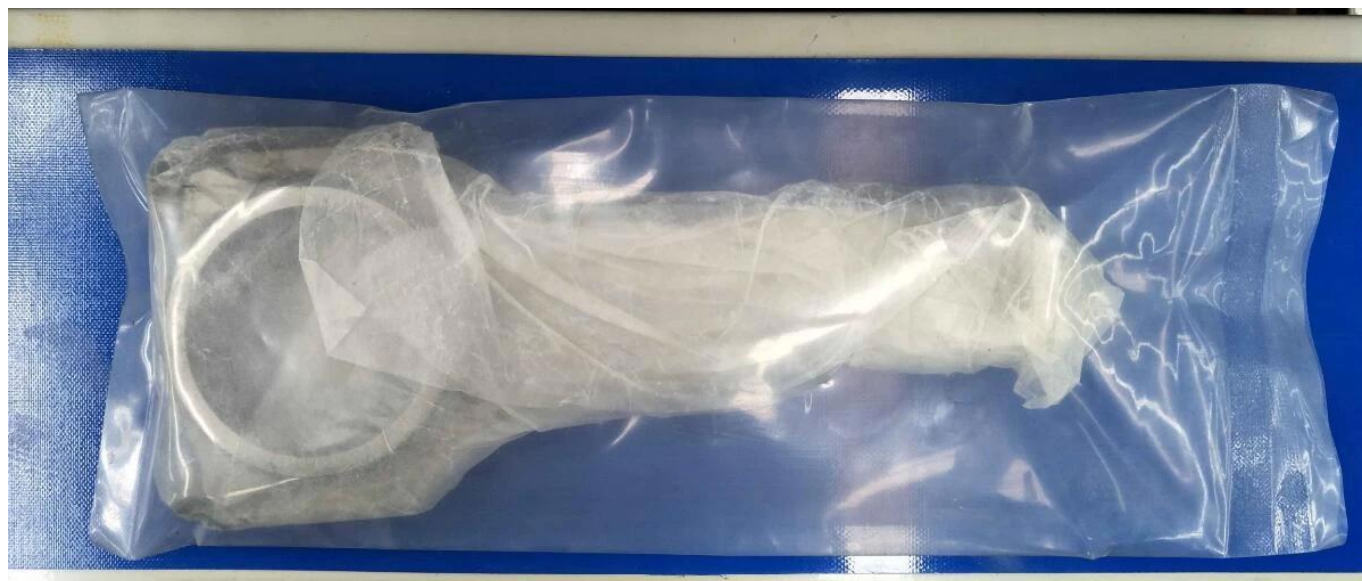

Second package:

A: Foam Package.



B: Neutral package

